

MSI

Making Dream Surfaces Attainable



Oxide


Porcelain Collection

www.msisurfaces.com

Colors



Blanc 12"x24"

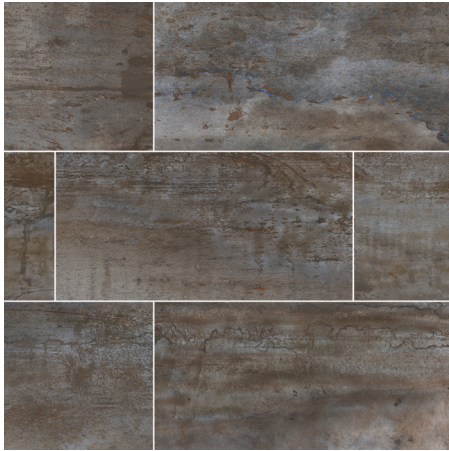

Iron 12"x24"



Magnetite 12"x24"

Size	Thickness	BLANC	IRON	MAGNETITE
2x2 MATTE	3/8"	NOXIBLA2X2	NOXIIRO2X2	NOXIMAG2X2
3x18	3/8"	NOXIBLA3X18BN-R	NOXIIRO3X18BN-R	NOXIMAG3X18BN-R
12x24	3/8"	NOXIBLA1224	NOXIIRO1224	NOXIMAG1224
24x48	3/8"	NOXIBLA2448	NOXIIRO2448	NOXIMAG2448

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V4	DCOF - > 0.42	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Pressed	Glazed

Express your signature style with the Oxide Collection. This 12"x24" large format porcelain tile is offered in three equally stunning colors Blanc, Iron, and Magnetite each with a unique distressed metallic look finish for lasting visual impact. Durable enough to stand up to the most well-traversed floors, this collection also adds interest and depth to backsplash, walls, and countertops. Whether you're going for that edgy industrial look or one that's more conventional, there's a place in your home for the Oxide Collection.

Technical Information

Primary Colors: White, Grey and Brown
Material Type: Glazed Porcelain
Finish: Matte

Features At A Glance

- Express your signature style with the Oxide Collection
- This 12x24 and 24x48 large format porcelain tile is offered in three equally stunning colors Blanc, Iron, and Magnetite each with a unique distressed metallic-look finish for lasting visual impact
- Durable enough to stand up to the most well-traversed floors, this collection also adds interest and depth to backsplash, walls, and countertops
- A slight metallic-look finish that adds interest to any room

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.
To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.
*No claims accepted after tile installation.

