


MSI

Making Dream Surfaces Attainable

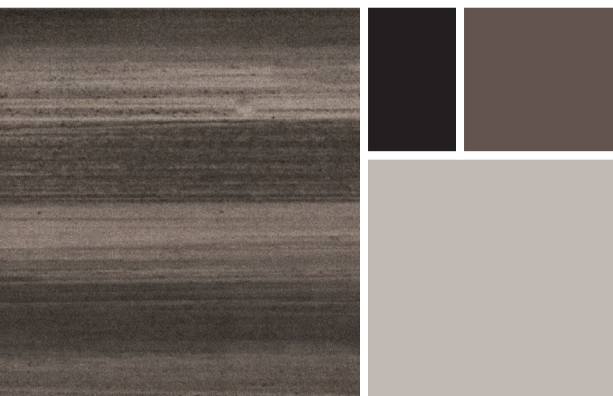


Watercolor
Porcelain Collection

www.msisurfaces.com

Colors



Bianco 12"x24"

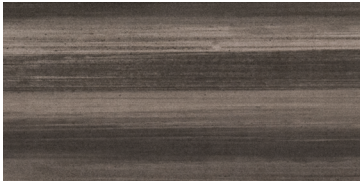

Graphite 12"x24"



Grigio 12"x24"

Trim



3.5" x 24" Bullnose

Size	Thickness	BIANCO	GRAPHITE	GRIGIO
12x24	3/8"	NWATBIA1224	NWATGRA1224	NWATGRI1224
6x36	3/8"	NWATBIA6X36	NWATGRA6X36	NWATGRI6X36
Chevron Mosaic	3/8"	NWATBIACHE12X15	NWATGRACHE12X15	NWATGRICHE12X15
3.5x24 SBN	3/8"	NWATBIA3.5X24BN	NWATGRA3.5X24BN	NWATGRI3.5X24BN

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				IV	V3	DCOF - > 0.42 Wet	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

With a stroke of a brush, the Watercolor line was created. It’s smooth, soft brush strokes create a relaxed harmony creating an ideal contemporary setting for any Home or Commercial application. Add a creative touch by combining its Chevron Mosaic for a longer lasting impression.

Technical Information

Primary Colors: White, Gray
Material Type: Glazed Porcelain
Finish: Matte

Features At A Glance

- Three subtle colors with the look of soft brush strokes create this unique contemporary new line
- High definition Ink Jet technology on pressed Italian tile for ease in installing
- Available in the popular 12x24 rectangle, 6x36" plank, a unique Chevron mosaic and a coordinating bull nose trim to cover most installation applications

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.