



AmericanBiltrite
Flooring



SONATA | ELEMENTS

LUXURY VINYL TILE

Sonata
ELEMENTS

Sonata ELEMENTS



The design sophistication and flexibility of carpet in a luxury vinyl tile.

Sonata Elements is an 18" x 36" Luxury Vinyl Tile with a 20-mil wear layer that combines the hygienic benefits of a luxury vinyl tile with a striated textile design inspired by modular carpet tiles.

This versatile flooring line features 5 neutral base colors and 10 color coordinated tone-on-tone and chromatic gradient accent tiles. The 15 tiles can be used monolithically or mixed allowing for functional wayfinding areas and unlimited flooring patterns.

Sonata Elements features a no-wax-for-life aluminum oxide polyurethane surface treatment, making it easy to clean and disinfect.

Sonata Elements can be coordinated with Sonata Wood planks and Sonata Stone tiles. All Sonata collections have proven to show no signs of surface attack, no color change and no tarnishing after repeated disinfection.

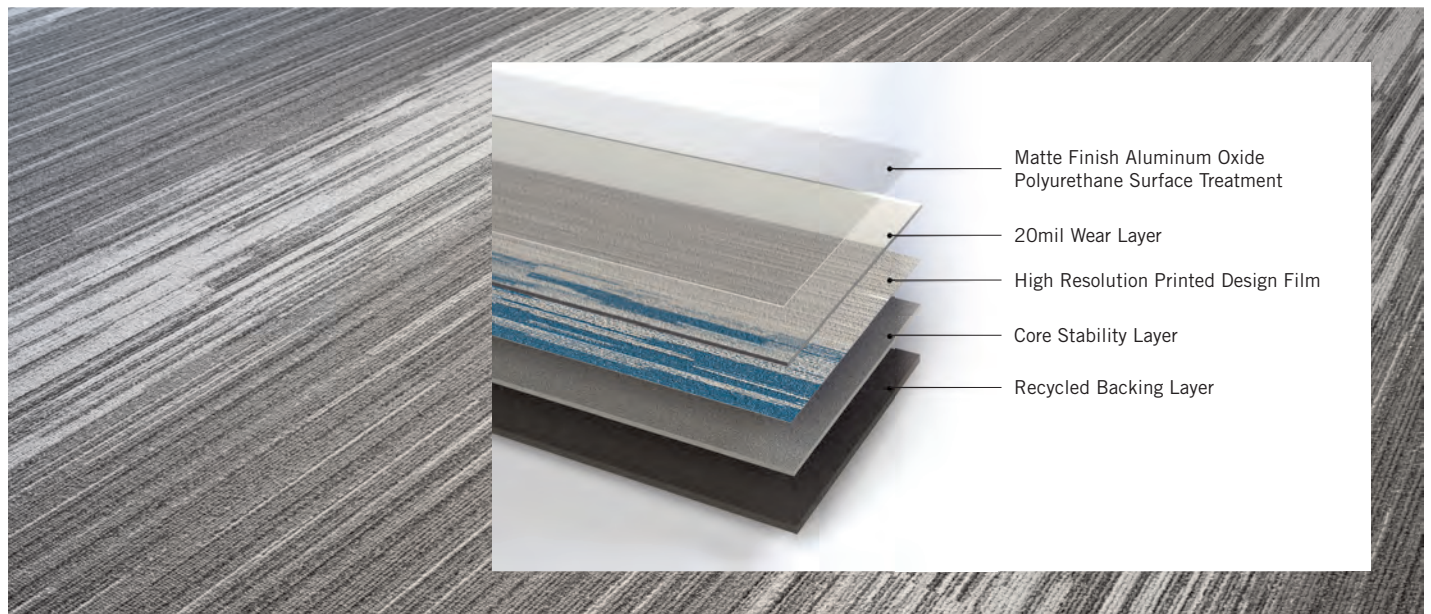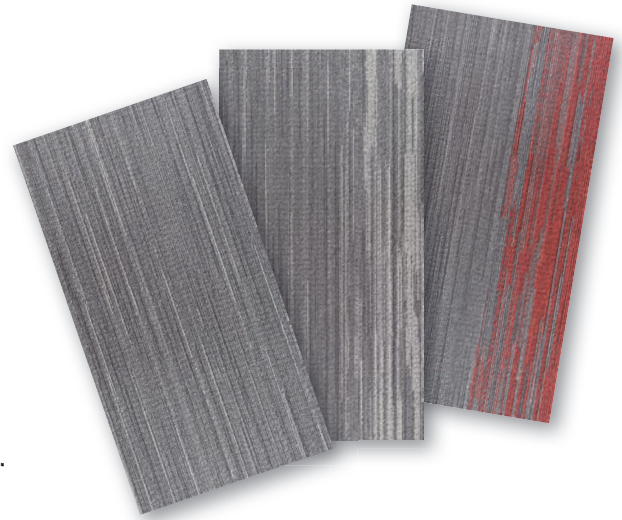

SEL-2B Medium Grey | Light Grey

COLORWAYS



SEL-1A Light Grey



SEL-1B Light Grey | Medium Grey




SEL-1C Light Grey | Blue



SEL-2A Medium Grey



SEL-2B Medium Grey | Light Grey

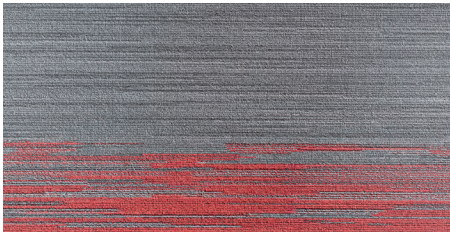


SEL-2C Medium Grey | Red



SEL-3A Dark Grey



SEL-3B Dark Grey | Light Grey

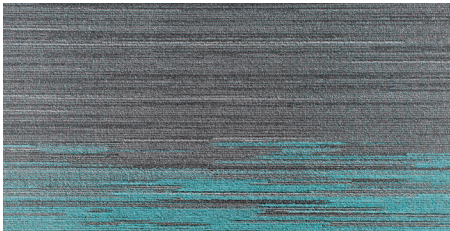


SEL-3C Dark Grey | Turquoise



SEL-4A Beige



SEL-4B Beige | Brown

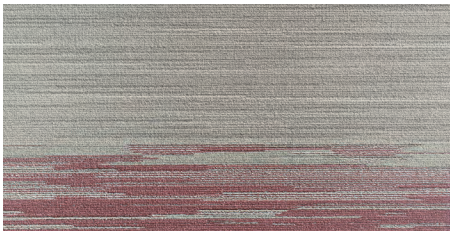

SEL-4C Beige | Burgundy




SEL-5A Cocoa



SEL-5B Cocoa | Greige



SEL-5C Cocoa | Green

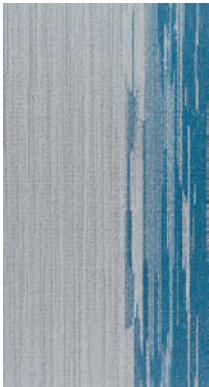

SEL-1C
Light Grey | Blue



SEL-1A
Light Grey




SEL-1B
Light Grey | Medium Grey



SEL-2A
Medium Grey


Flooring pattern

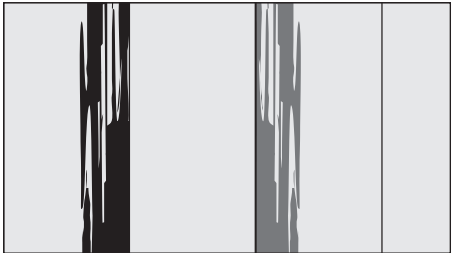

DOUBLE/SINGLE




SEL-2A
Medium Grey

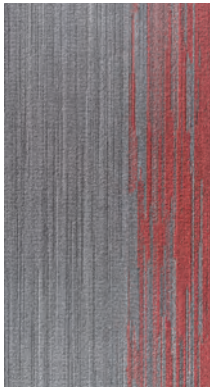

SEL-2C
Medium Grey | Red

Flooring pattern



SINGLE STRIPE



SEL-1B

Light Grey | Medium Grey



SEL-1C


Light Grey | Blue



SEL-1A

Light Grey

Flooring pattern

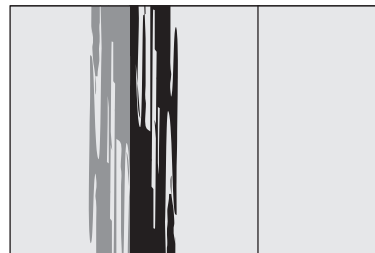

MIRROR STRIPE



SEL-5C
Cocoa | Green



SEL-5A
Cocoa


Flooring pattern



INVERSED STAGGER



SEL-3A
Dark Grey

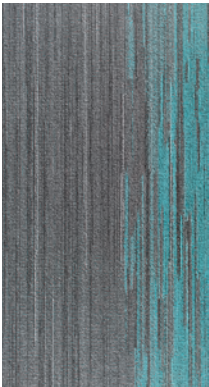


SEL-3C
Dark Grey | Turquoise




SEL-1A
Light Grey

Flooring pattern

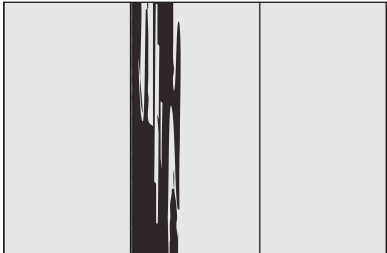

SINGLE CORRIDOR

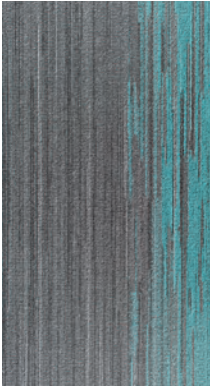

SEL-3C
Dark Grey | Turquoise

Flooring pattern



FLIPPED MIRROR



Flooring pattern



SEL-2B

Medium Grey | Light Grey

MIRROR




SEL-4A
Beige



SEL-5A
Cocoa

Flooring pattern



INTERMITTENT CHECKER



SEL-4C
Beige | Burgundy



SEL-4A
Beige



ZIG-ZAG



Flooring pattern



SEL-4B
Beige | Brown

BRICK STYLE


FLOORING PATTERNS




DOUBLE/SINGLE PAGE 4



SINGLE STRIPE PAGE 5

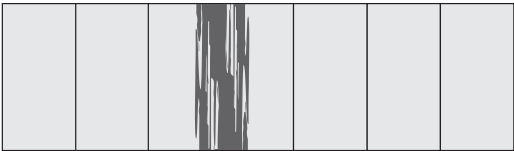


MIRROR STRIPE PAGE 6

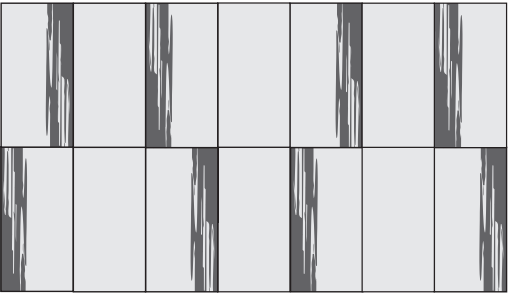


INVERSED STAGGER PAGE 7




SINGLE CORRIDOR PAGE 8

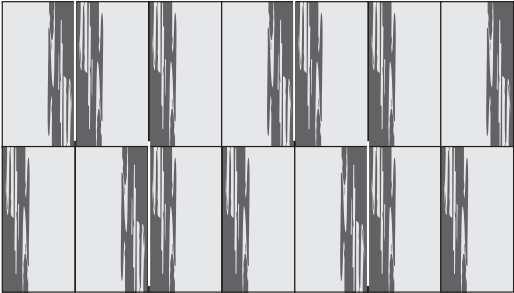


FLIPPED MIRROR PAGE 9

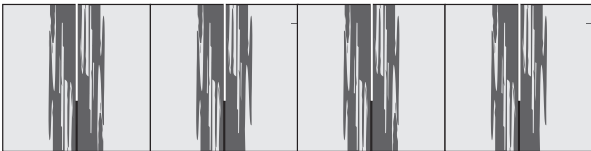


MIRROR PAGE 10

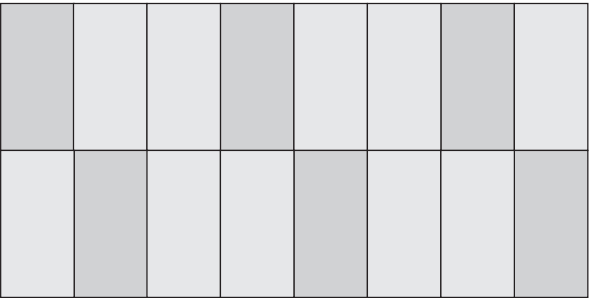

INTERMITTENT CHECKER PAGE 11

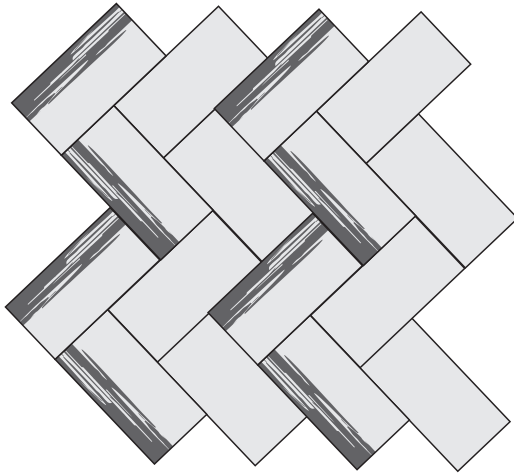

ZIG-ZAG PAGE 12

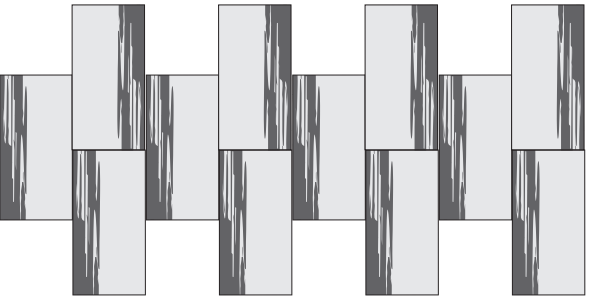


BRICK STYLE PAGE 13

FLOOR CREATOR

Discover the Sonata Elements LVT Floor Creator App and create unlimited unique flooring designs.

Visit sonata.american-biltrite.com to access the app.

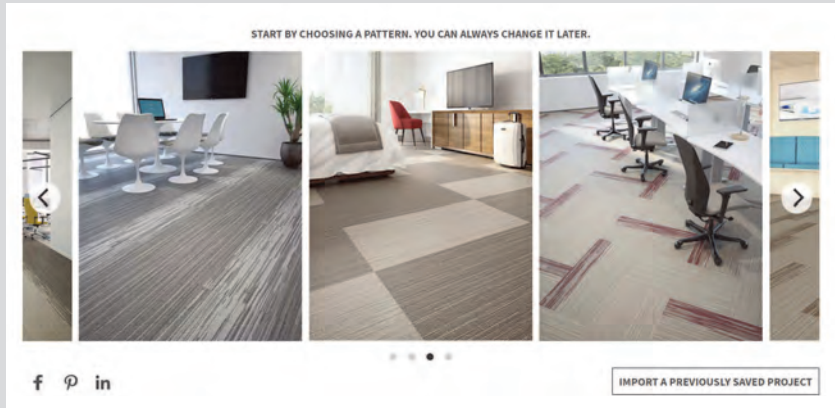


Start by choosing one of the ten pre-set flooring patterns.

You can easily modify the patterns to create your own unique design.



Specify a floor size according to your project requirements. The tiles can be installed at different angles and even flipped 180°.

Pick from fifteen tile colors— five cool and warm neutral base colors supported by ten 2-tone accent tiles.

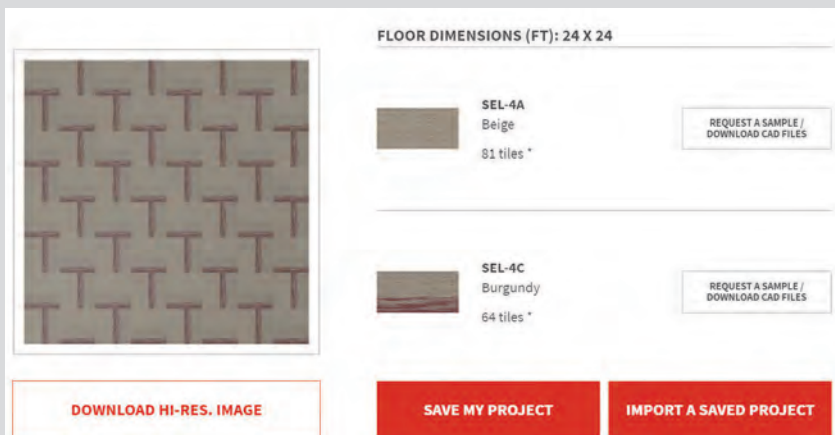

The app will calculate the quantities per color required for your project.

You can easily save and re-upload the project into the app for later use. The app also allow you to download CAD files and request samples.



AmericanBiltrite
Flooring

SONATA® | ELEMENTS™

TECHNICAL SPECIFICATIONS

Gauge	0.098"	2.50 mm
Size	18" x 36"	457 mm x 915 mm
Wear Layer Thickness	0.020"	0.5 mm
ASTM F 1700	Product Classification: Solid Vinyl Floor Tile	Class III, Type A or B
ASTM D 2047	Static Coefficient of Friction (leather/neolite)	≥ 0.5 / ≥ 0.9
ASTM D 3389	Abrasion Resistance (H-22, 500 g @ 1,000 cycles)	PASS
ASTM E 648	Critical Radiant Flux CRF (W/cm²)	≥ 0.45
ASTM E 662	Smoke Density	≤ 450
ASTM F 925	Chemical Resistance	Exceeds
ASTM F 970	Static Load (modified at 2,500 psi)	≤ 0.005"
ASTM F 1514	Heat Stability	ΔE ≤ 8.0
ASTM F 1515	Light Stability	ΔE ≤ 8.0
ASTM F 1914	Indentation	Residual < 8%
ASTM F 2055	Squareness	0.010" maximum
Indoor Air Quality (IAQ)	FloorScore Certified by SCS Certification	
Volatile Organic Compounds (VOC's)	Registration Number SCS-FS-03325	
Maintenance	Very low	
PU (Polyurethane) surface treatment containing Aluminum Oxide	Facilitates maintenance	
Adhesives	PS-30, AD-610	Regular traffic
	AD-590	Heavy traffic/rolling loads
Limited Wear Warranty	10 years for commercial installations 20 years for residential installations	

Please note that technical Website documents prevail.

american-biltrite.com



American Biltrite, 200 Bank Street, Sherbrooke, Quebec, Canada J1H 4K3
To order samples: flooring@american-biltrite.com | 1.800.437.8743 | Fax 1.800.810.5731 | Technical Services: 1.800.479.0190

Printed in Canada BRO-E1-ELE Issued: 11/2021

® / SONATA is a registered trademark of American Biltrite TM / SONATA ELEMENTS is an American Biltrite trademark name