


Features

- Commercially rated high performance
- FloorScore® certified - no traces of VOCs, phthalate-free, no formaldehyde off-gassing, and are 100% recyclable

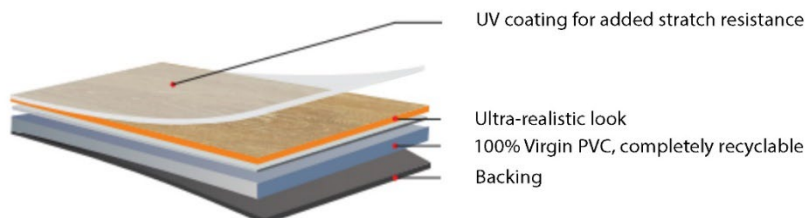

Product Information

Product Line	High Performance Luxury Vinyl Flooring
Construction	Dryback vinyl
Dimension	2.5mm x 184mm x 1219mm
Wear Layer Thickness	0.5mm (20 mil)
Finish	2-pass UV cured Urethane Finish
Installation	Glue Down
Warranty	Life-time Residential and 15 Year Commercial Warranty when installed with Twelve Oaks specified adhesive.

Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970-15	Residual Indentation: 0.04mm
Dimensional Stability	ASTM F2199-09	Pass
Resistant to Chemicals	ASTM F925-13	Pass: No change
Residual Indentation	ASTM F1914-07	Pass
Abrasion	ASTM D4060-14	1000g Load 5000 Cycles 91mg weight loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Resistant to Heat	ASTM F1514-03	Pass
Castor Chair Resistance	NALFA LF01-2011	No Visible Damage
Reaction to Fire	EN13501-1	Class Bfl - s1

Packaging Information

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
Plank	1219	184	2.5		
Carton	1229	194	45	38.7	38

Pallet Information

	Length (mm)	Width (mm)	Height (mm)	Volume (m³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Pallet	1237	985	505	0.62	55	2128.5	2090