



WALDEN STONE


Porcelain Tile






60 x 120 cm (24" x 48")

WALDEN STONE Antracite - Rectified

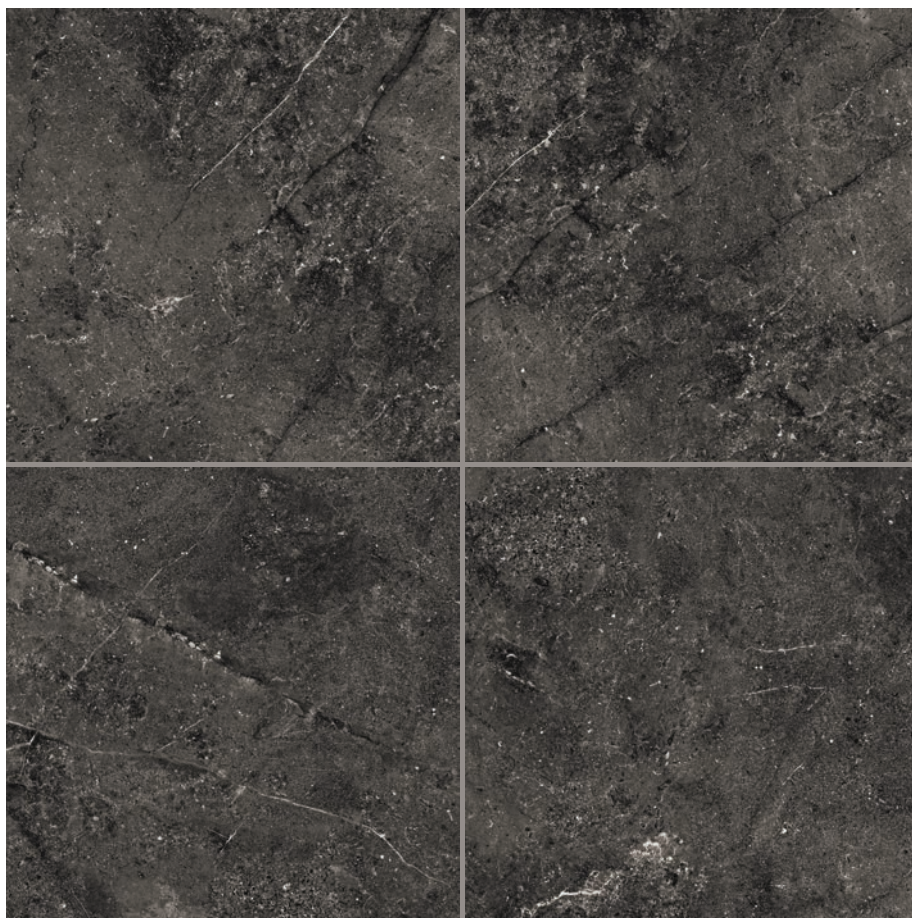

60 x 60 cm (24" x 24")

WALDEN STONE Antracite - Rectified

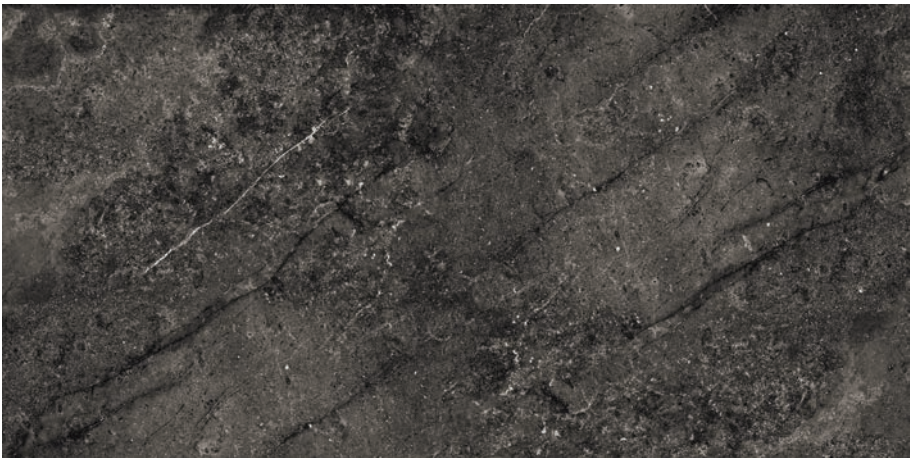


60 x 120 cm (24" x 48")

WALDEN STONE Antracite - Polished & Rectified



60 x 60 cm (24" x 24")

WALDEN STONE Antracite - Rectified

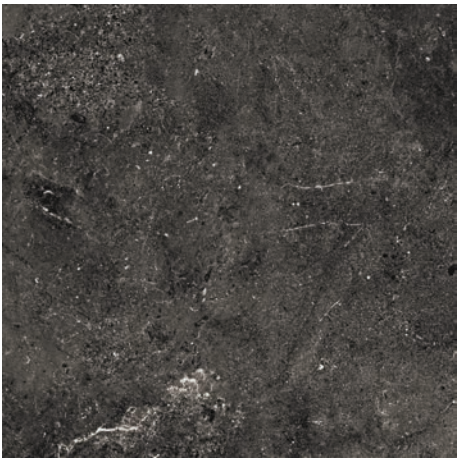

60 x 60 cm (24" x 24")

WALDEN STONE Antracite - Polished & Rectified



30 x 60 cm (12" x 24")

WALDEN STONE Antracite



7,5 x 30 cm (3"x12")


WALDEN STONE
Antracite Bullnose



5 x 5 cm (30 x 30 cm Sheet)

2" x 2" (12" x 12" Sheet)

WALDEN STONE
Antracite Mosaics



5 x 5 cm (30 x 30 cm Sheet)

2" x 2" (12" x 12" Sheet)

WALDEN STONE
Antracite Basketweave Mosaics



(33 x 33 cm Sheet)

(13" x 13" Sheet)

WALDEN STONE
Antracite Random Stripe



60 x 120 cm (24" x 48")

WALDEN STONE White - Rectified



30 x 60 cm (12" x 24")

WALDEN STONE White



60 x 120 cm (24" x 48")
WALDEN STONE White - Polished & Rectified



60 x 60 cm (24" x 24")
WALDEN STONE White - Rectified



60 x 60 cm (24" x 24")
WALDEN STONE White - Polished & Rectified




30 x 60 cm (12" x 24")
WALDEN STONE White




7,5 x 30 cm (3"x12")
WALDEN STONE
White Bullnose



5 x 5 cm (30 x 30 cm Sheet)
2" x 2" (12" x 12" Sheet)
WALDEN STONE
White Mosaics



5 x 5 cm (30 x 30 cm Sheet)
2" x 2" (12" x 12" Sheet)
WALDEN STONE
White Basketweave Mosaics



(33 x 33 cm Sheet)
(13" x 13" Sheet)
WALDEN STONE
White Random Stripe



60 x 120 cm (24" x 48")

WALDEN STONE Grey - Rectified



60 x 120 cm (24" x 48")
WALDEN STONE Grey - Polished & Rectified



60 x 60 cm (24" x 24")
WALDEN STONE Grey - Rectified



60 x 60 cm (24" x 24")
WALDEN STONE Grey - Polished & Rectified



30 x 60 cm (12" x 24")
WALDEN STONE Grey



7,5 x 30 cm (3"x12")
WALDEN STONE
Grey Bullnose



5 x 5 cm (30 x 30 cm Sheet)
2" x 2" (12" x 12" Sheet)
WALDEN STONE
Grey Mosaics



5 x 5 cm (30 x 30 cm Sheet)
2" x 2" (12" x 12" Sheet)
WALDEN STONE
Grey Basketweave Mosaics



(33 x 33 cm Sheet)
(13" x 13" Sheet)
WALDEN STONE
Grey Random Stripe



PACKING INFORMATION

PRODUCT	THICKNESS	Pcs x Box	Sqm x Box	Sqft x Box	Kgs x Box	Lbs x Box	Box x Pal	Sqm x Pal	Sqft x Pal	Kgs x Pal	Lbs x Pal
30 x 60 cm - (12"x24") Walden Stone	0,8 mm. - 0,32"	9	1,62	17,43	28,4	62,60	32	51,84	558,00	933	2056
60 x 60 cm - (24"x24") Rectified Walden Stone	9,5 mm. - 0,38"	4	1,44	15,49	28,7	63,30	30	43,20	465,00	885	1951
60 x 120 cm - (24" x48") Rectified Walden Stone	10,0 mm. - 0,39"	2	1,44	15,49	33,4	73,65	30	43,20	465,00	1020	2249
60 x 60 cm - (24" x24") Polished & Rectified Walden Stone	9,5 mm. - 0,38"	4	1,44	15,49	28,7	63,30	30	43,20	465,00	885	1951
60 x 120 cm - (24" x48") Polished & Rectified Walden Stone	10,0 mm. - 0,39"	2	1,44	15,49	33,4	73,65	30	43,20	465,00	1020	2249
7,5X30 (3"X24") Walden Stone Bullnose	0,8 mm. - 0,32"	8	-	-	4,2	9,26	203	-	-	867	1911
5x5 (2"x2") - 30X30 (12"X12") Walden Stone Mosaics	0,8 mm. - 0,32"	10	0,88	9,47	18	39,68	48	42,34	455,74	894	1971
33x33 (13"x13") Walden Stone Random Stripe	0,8 mm. - 0,32"	10	1,06	11,41	17	37,48	48	50,85	547,34	846	1865
5x5 (2"x2") - 30x30 (12"x12") Walden Stone Basketweave Mosaics	0,8 mm. - 0,32"	10	0,9	9,69	18	39,68	48	43,2	465,00	894	1971

GENERAL SPECIFICATIONS

TECHNICAL FEATURES	NORMS	PORCELAIN TILE		MONTECERA AVERAGE VALUE
		Requirement for Nominal Size N.		
		7 cm ≤ N < 15 cm	N ≥ 15 cm	MATT
LENGTH AND WIDTH	EN ISO 10545-2	± 0,90 mm	± 0,6% ±2,0 mm	Confirmed
THICKNESS	EN ISO 10545-2	± 0,50 mm	± 0,5%	Confirmed
STRAIGHTNESS	EN ISO 10545-2	± 0,75 mm	± 0,5% ±1,5 mm	Confirmed
SQUARNESS	EN ISO 10545-2	± 0,75 mm	± 0,6% ±2,0 mm	Confirmed
SURFACE FLATNESS	EN ISO 10545-2	± 0,75 mm	± 0,5% ±2,0 mm	Confirmed
WATER ABSORPTION	EN ISO 10545-3	≤ 0,5%		≤ 0,5%
BREAKING STRENGHT	EN ISO 10545-4	1300 N		1400 N
MODULUS OF RUPTURE	EN ISO 10545-4	≥ 35 N/mm²		≥ 40 N/mm²
THERMAL SHOCK RESISTANCE	EN ISO 10545-9	Required		Resistant
FROST RESISTANCE	EN ISO 10545-12	Required		Resistant
CHEMICAL RESISTANCE	EN ISO 10545-13	Indicated by manufacturer		Resistant
RESISTANCE TO STAINS	EN ISO 10545-14	Indicated by manufacturer		Resistant
DCOF (Wet)	ANSI B 101.3	Indicated by manufacturer		> 0,42
SCRATCH HARDNESS (MOHS)		Indicated by manufacturer		Min. 6
ABRASION RESISTANCE (PEI)	EN ISO 10545-7	Indicated by manufacturer		4
SHADE VARIATION		Indicated by manufacturer		V3