


Marvelous Plus 425 Extra Heavy Commercial LVT

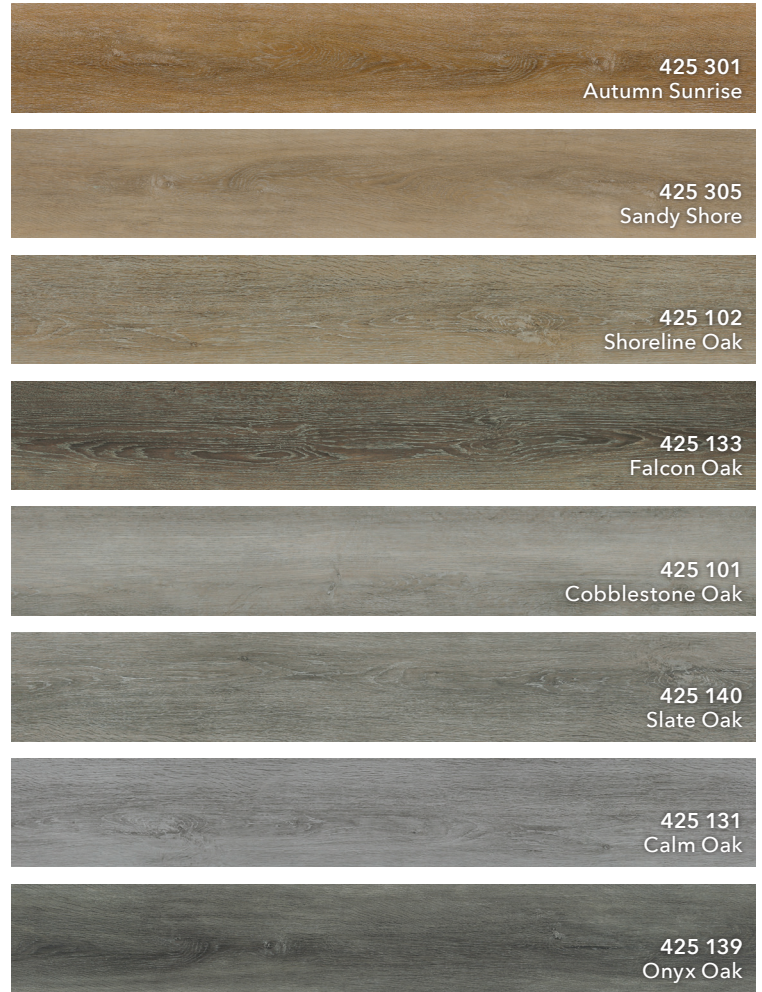

Size

7.25" x 48"
3 mm thick

Wear Layer

28 mil / UV-Cured Urethane
MCX™ MicroCeramic Reinforced Resin

Embossing

Realistic Texture
Embossed in Register

Edge Treatment

Beveled

Installation

Full Spread Adhesive
Recommended Adhesive:
NEXT 1200™

Packaging

14 pieces per carton (40 lbs)
33.8 SF per carton
55 cartons per pallet
20 pallets per 20ft container

Testing

Critical Radiant Flux
Surface Flammability
Coefficient of Friction
Static Load Limit
Sound Transmission Class (STC)
Impact Insulation Class (IIC)
High Frequency Impact Insulation Class (HIIC)
ASTM E648 Class I
DOC FF 1-70 Passed
ASTM 2047 Passed >0.6
ASTM F970 1300 lbs
ASTM E492 64
ASTM E989 69
ASTM E3222 89



Product Classification

ASTM F1700 Class III, Type B

Warranties

Lifetime Waterproof
Lifetime Residential Wear
30-Year Commercial Wear
See full warranty text at nextfloor.net

Coordinating Moldings

See nextfloor.net for more details.

Sample SKUs

Handle Board
HB425NF

5 per carton (48.3 lbs)

Folder

3P425NF
10 per carton (45.8 lbs)